

## Application Note

### 1. Introduction

This document provides the e2v ADCs and DMUX users with the different termination techniques to be used with e2v products. A wide panel of configurations for the analog and clock inputs as well as for the data outputs are described in detail.

The principles of each technique are also presented so that one can eventually choose the proper implementation at the input and output of our products, considering one's application.

Finally, this document is not exhaustive. Nevertheless, it covers a wide area in terms of I/O termination techniques.

### 2. Analog Input Termination Techniques


There are many different termination techniques, which can be used to reduce the impact of the transmission line effects. An overview of the Standard Input termination methods, which can be used for e2v ADCs analog inputs, is provided in the following sections.

Since e2v ADCs are both single-ended and differential-compatible, both cases will be treated in the next sections.


#### 2.1 Single-ended Configuration

The following figure illustrates two input configurations, when the single-ended mode is chosen for the analog input. Here, the common mode of the driving system is assumed to be the same as the one for the analog input of the ADC (Ground).

**Figure 2-1.** Configuration without Additional Termination Resistor

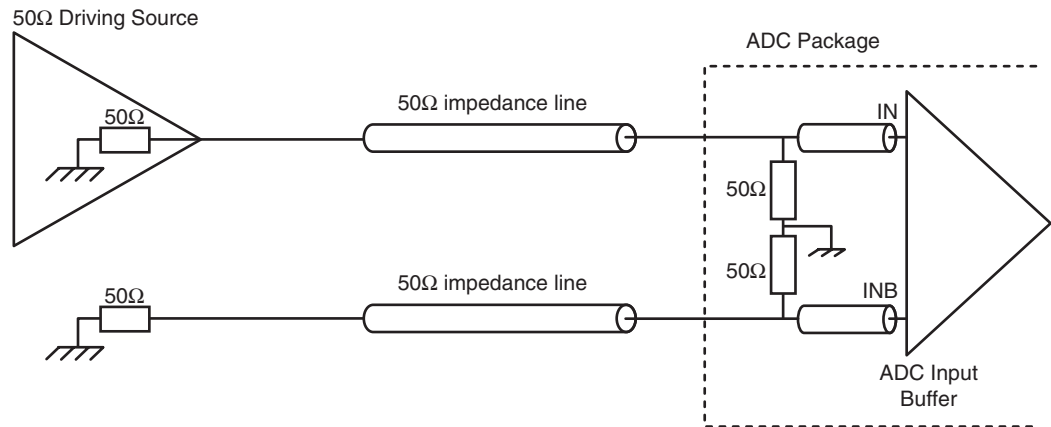

**Figure 2-2.** Configuration with 50Ω Termination Resistor

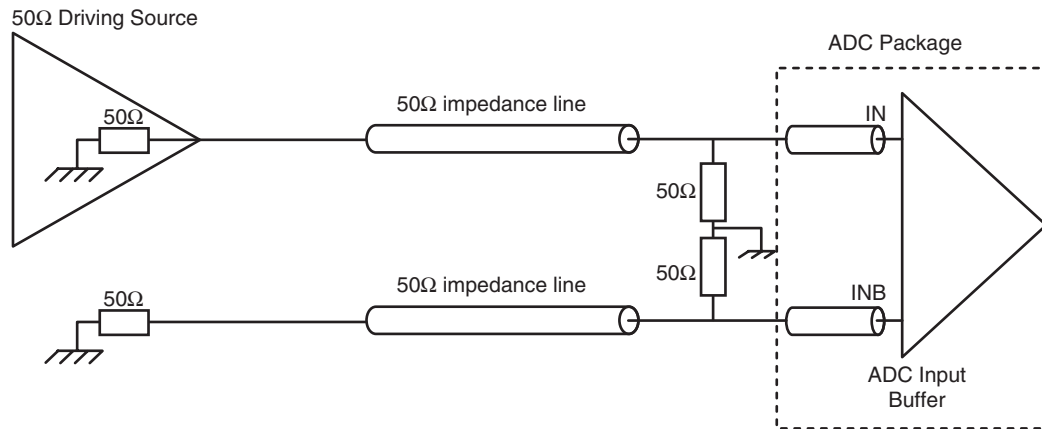


The first configuration may well be used in the case of an ADC device featuring an internal 50Ω termination (inside the cavity for the TS83102G0 10-bit 2 Gsps ADC and on package for the TS8388BG 8-bit 1 Gsps ADC).


The second configuration should be used when the differential analog input of the device is not already 50Ω terminated.

If the system, which is driving the analog input, needs to be terminated externally, the termination techniques are the following.

**Figure 2-3.** Configuration without Additional Termination Resistor

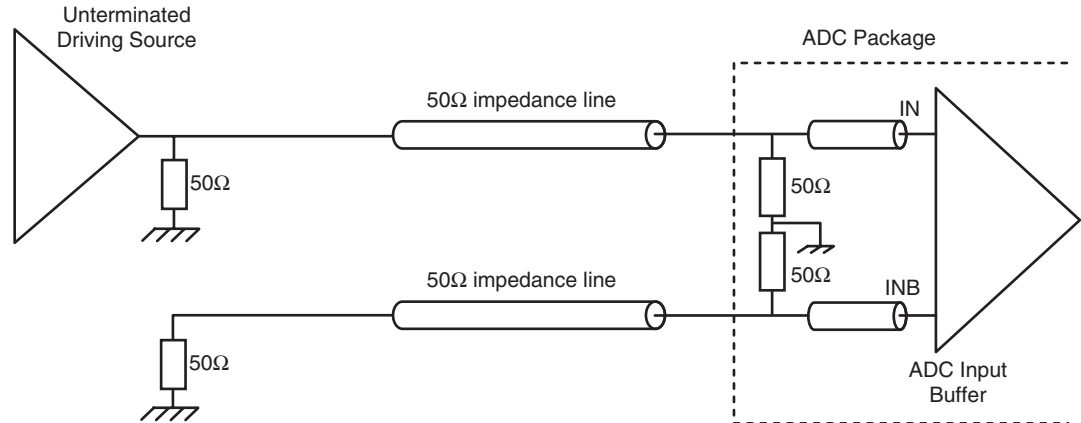


**Figure 2-4.** Configuration with 50Ω Termination Resistor

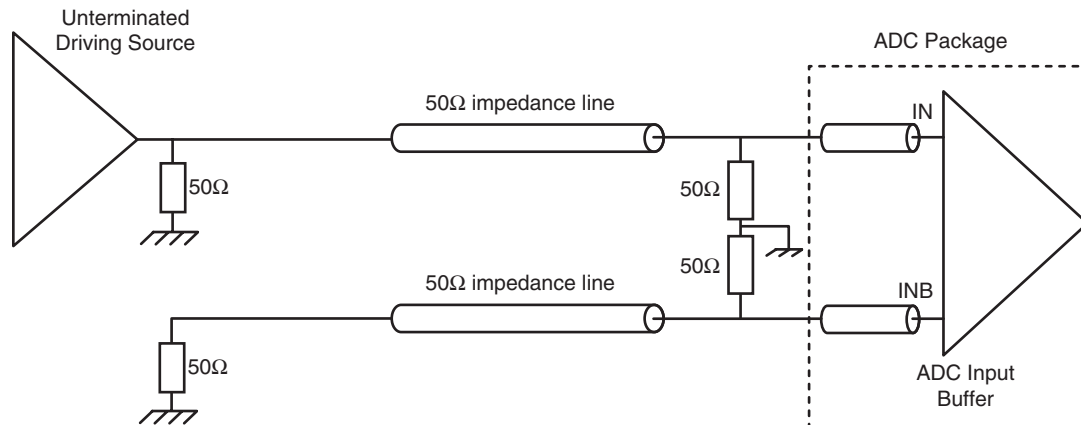


In all the previous configurations, it was assumed that there was no need to adjust the common mode (CM). If the common mode from the driving device is not the same as the one specified for the analog input of the ADC (GROUND), the user may have to choose between the configurations illustrated below.

**Figure 2-5.** Configuration without Additional Termination Resistor and with Coupling Capacitor

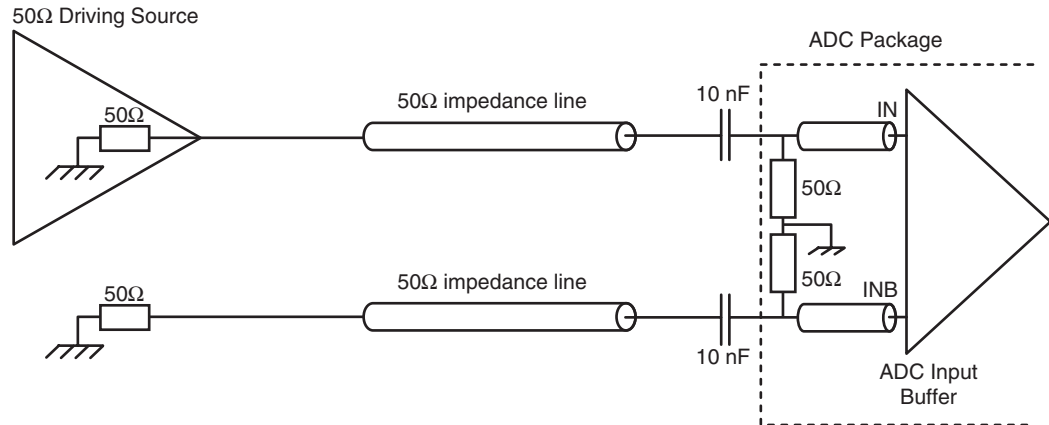

Note: The values of the coupling capacitors are given for information only. They may change depending on the input frequency.

**Figure 2-6.** Configuration with 50Ω Termination Resistor and with Coupling Capacitor

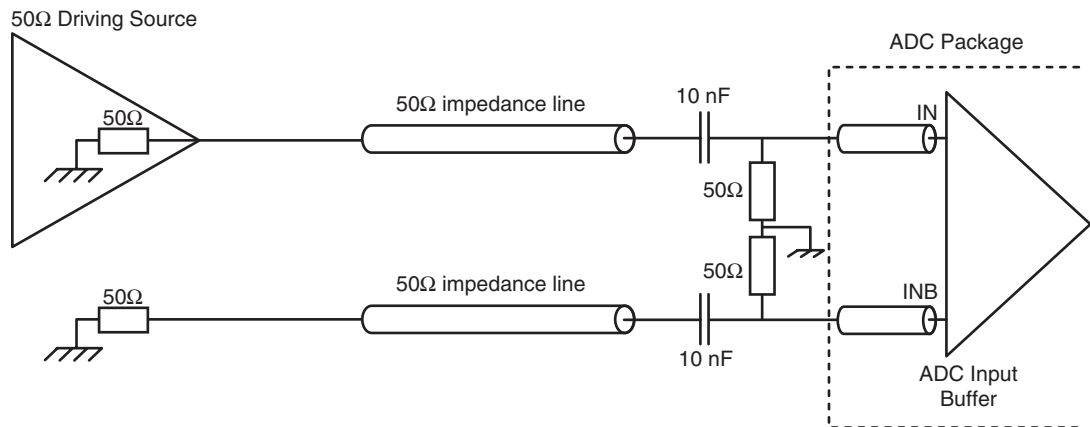


If the driving system has to be terminated, a 50Ω resistor has to be connected between the output of the system and the ground, as already described in the previous sections.

Note: The values of the coupling capacitors are given for information only. They may change depending on the input frequency.


## 2.2 Differential Configuration

When the analog input is to be used in differential mode and assuming that the common mode of the driving system is the same as the one for the input of ADC (Ground), the possible configurations are the following:


**Figure 2-7.** Configuration without Additional Termination Resistor

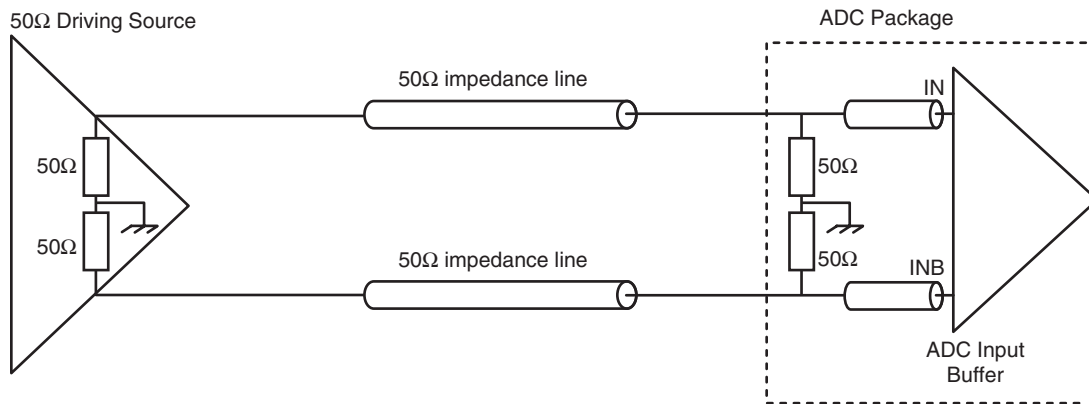

**Figure 2-8.** Configuration with Differential 50Ω Termination Resistors and with Grounded Middle Point

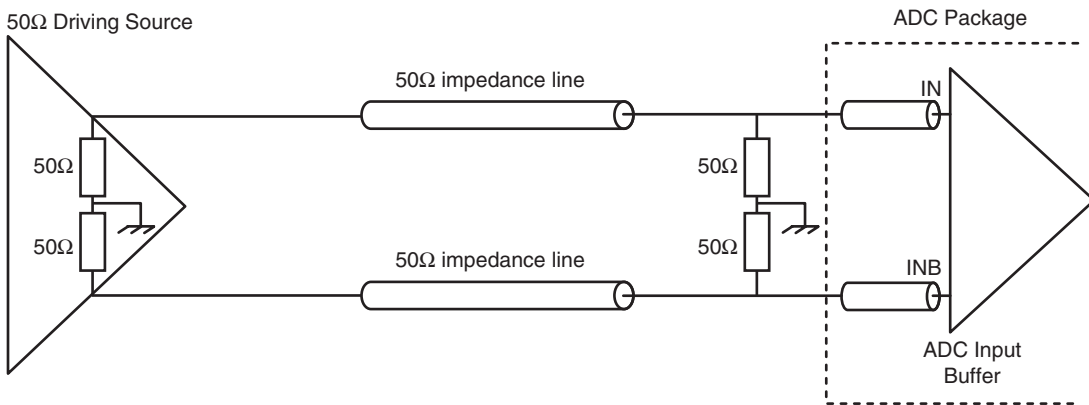


**Figure 2-9.** Configuration with Differential 50Ω Termination Resistors and with Decoupled Middle Point

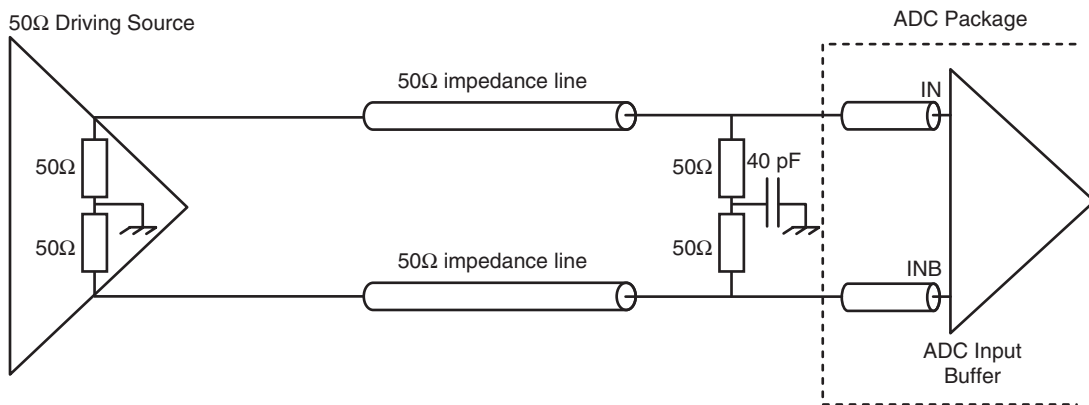


Note: The values of the coupling capacitors are given for information only. They may change depending on the input frequency.

**Figure 2-10.** Configuration with Differential 100Ω Termination Resistors and with Floating Middle Point

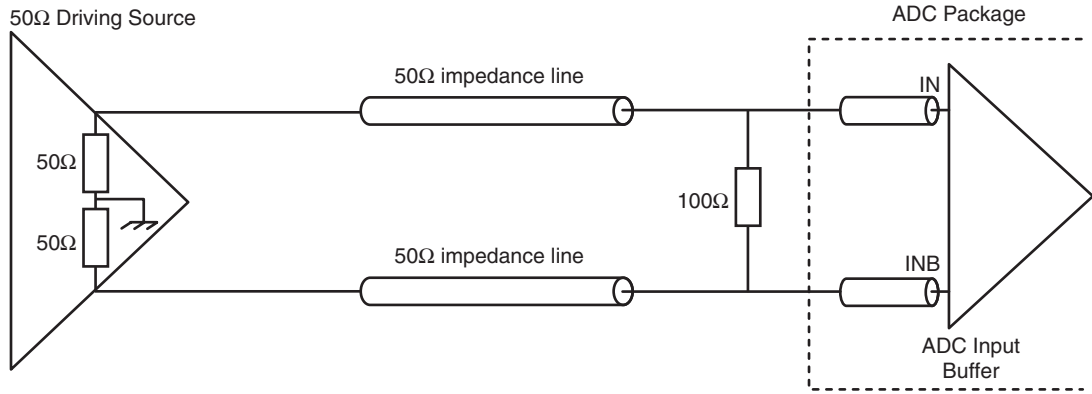


If the common mode of the driving system is not the same as the one of the input of the ADC, the previous configurations become.

**Figure 2-11.** Configuration without Additional Termination Resistor

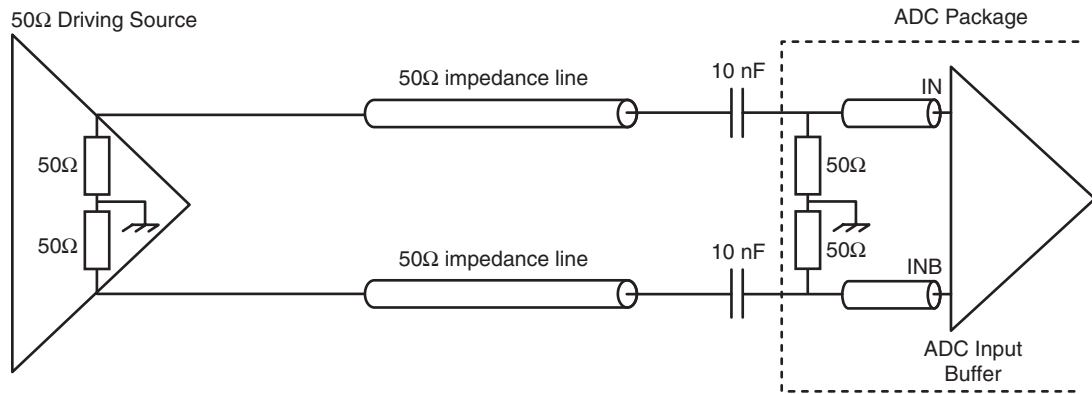


Note: The values of the coupling capacitors are given for information only. They may change depending on the input frequency.

**Figure 2-12.** Configuration with Differential 50Ω Termination Resistors and with Coupling Capacitors

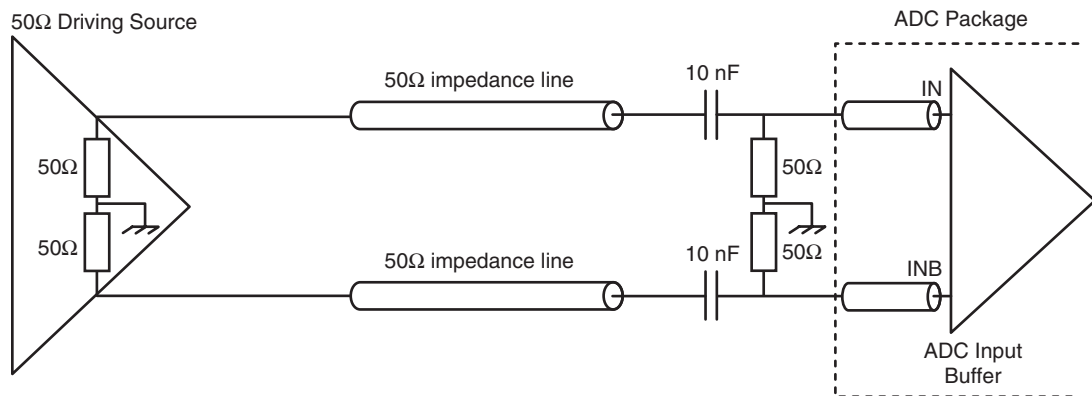

Note: The values of the coupling capacitors are given for information only. They may change depending on the input frequency.

**Figure 2-13.** Configuration with Differential 100Ω Termination Resistors and with Coupling Capacitors

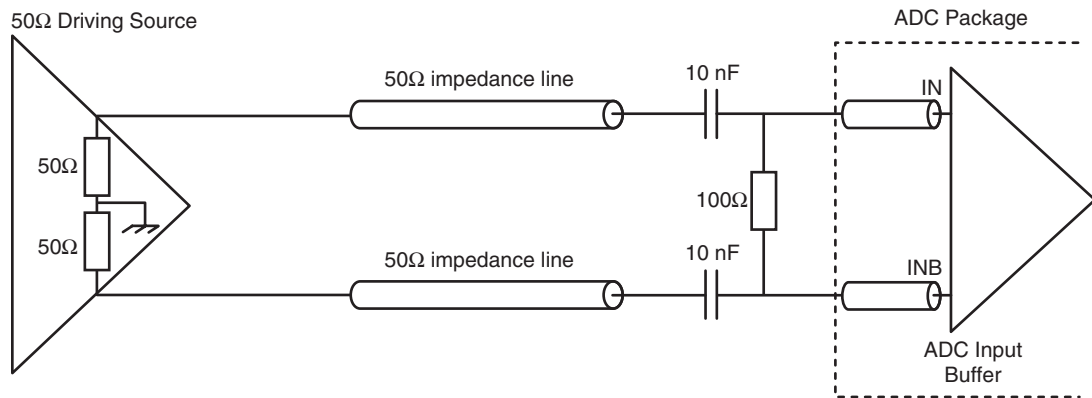

Note: The values of the coupling capacitors are given for information only. They may change depending on the input frequency.

The same schemes are valid when the driving system is not terminated. In these cases, the user only has to add the external 50Ω resistors on both outputs of the driving system in the schemes.


The user may only have a single-ended generator to drive the ADC input differentially (preferred way at high sampling rates). In this case, the user still has the opportunity to use a balun. The different configurations in this mode of operation are described in the next section.

## 2.3 Configuration with a Balun


The following section only represents the three general cases illustrating the use of a balun to convert the single-ended signal from the generator into a differential signal for the ADC input. The different cases with an unterminated driving system have not been presented.

The user can refer to the schemes given previously for these configurations.


**Figure 2-14.** Configuration without Additional Termination Resistor

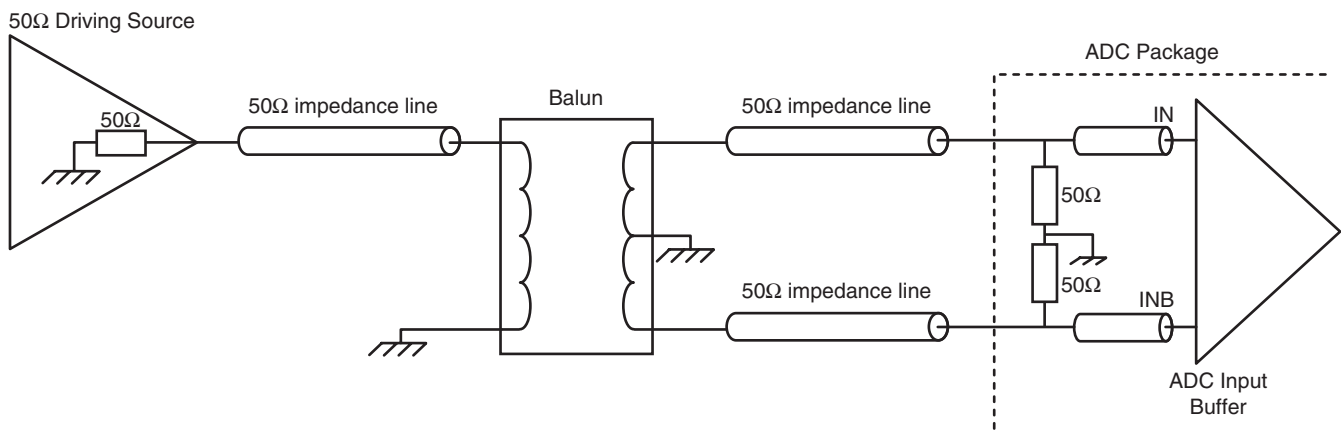

**Figure 2-15.** Configuration with Differential 50Ω Termination Resistors and with Grounded Middle Point

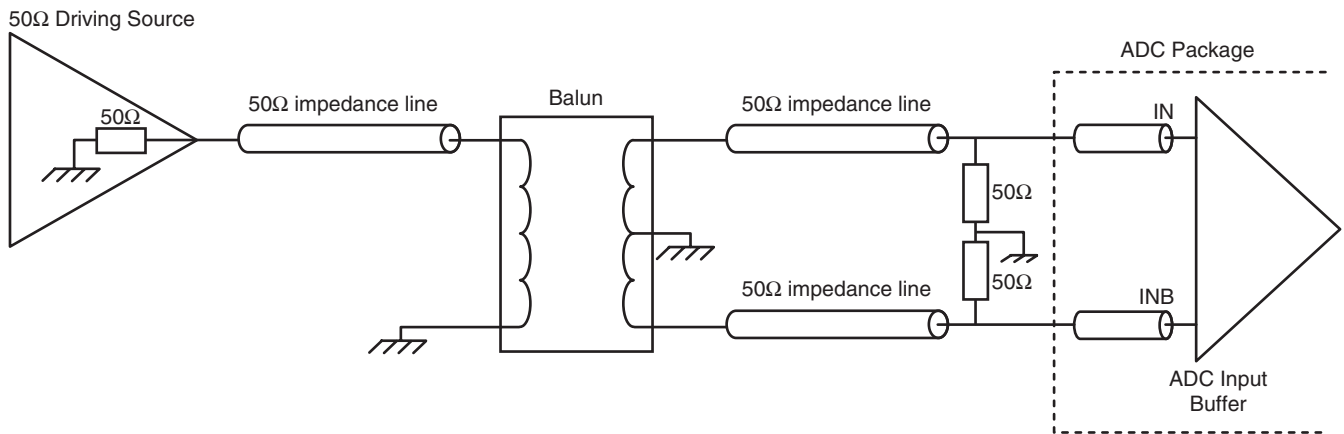

**Figure 2-16.** Configuration with Differential 100Ω Termination Resistors and with Floating Middle Point

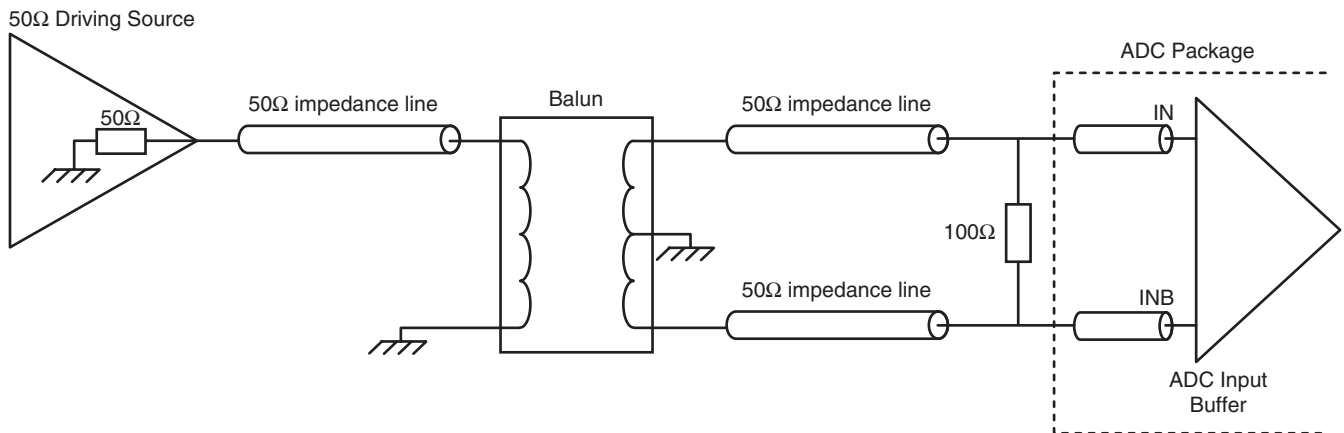




## 3. Clock Input Termination Techniques

In the case when the clock input of the ADC is not used in ECL levels but is centered around 0V, the configurations presented for the analog inputs (ground common mode voltage), **except the AC coupled cases**, can be transferred to the input clock.


### 3.1 ECL Single-ended Configuration

With a clock in ECL level, the main idea to abide by is to connect the negative clock to the common mode voltage of the positive clock input:  $-1.3V$  (ECL) through a  $50\Omega$  termination resistor (if not already implemented).

**Figure 3-1.** Configuration without Additional  $50\Omega$  Termination Resistor

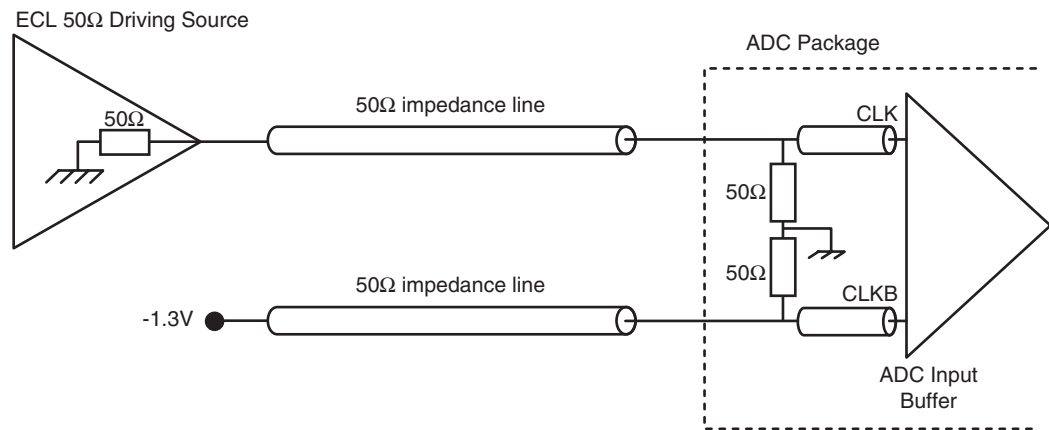

**Figure 3-2.** Configuration with  $50\Omega$  Termination Resistor

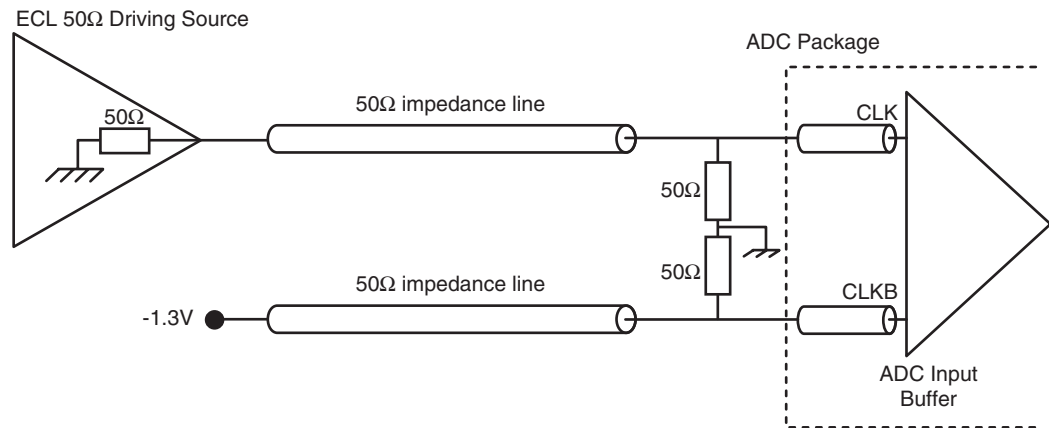


## 3.2 ECL Differential Configuration (ADCs Only)

When the clock is used in differential mode with ECL levels, two cases can be taken into consideration:


- The ADC is 50Ω on-package (or internally) terminated
- The ADC needs an external termination

Each configuration is described in what follows

**Figure 3-3.** ADC Configuration with External Termination

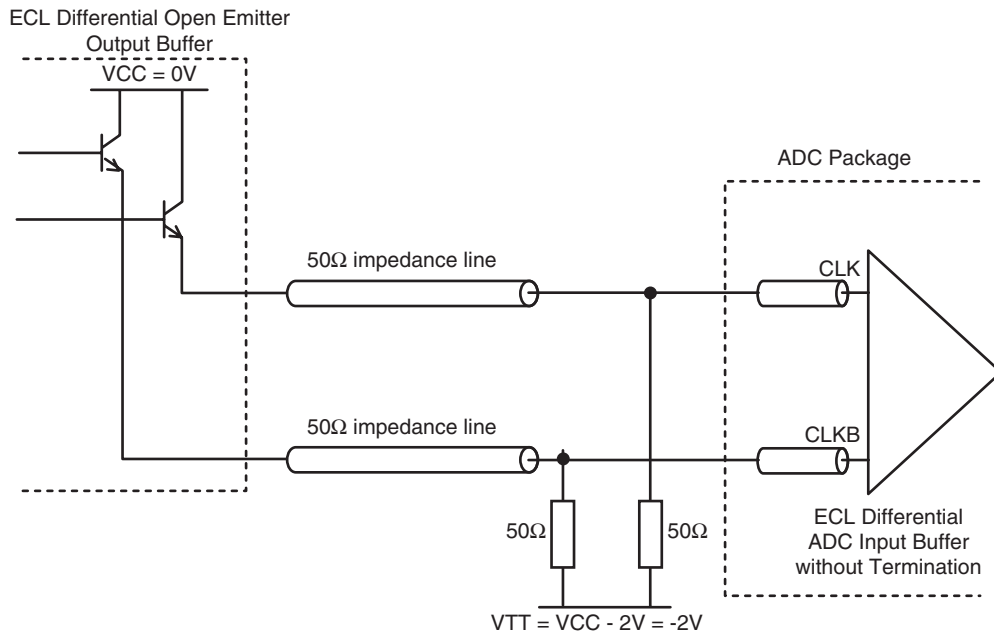


**Figure 3-4.** ADC Configuration with 50Ω On-package (or internal) Termination

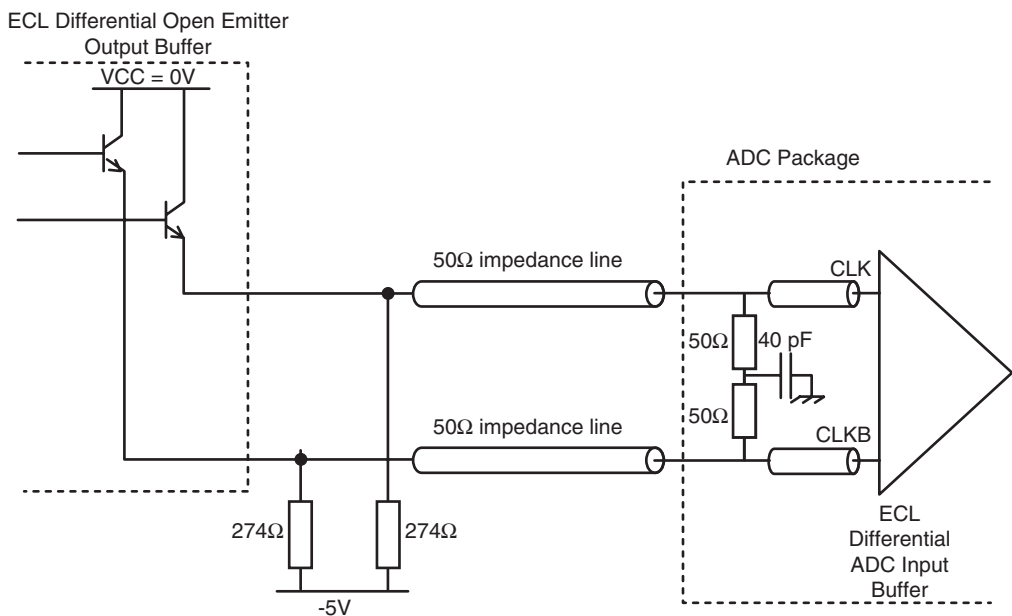

Note: Since the ADC is already terminated, the standard termination scheme for the ECL driver ( $V_{TT} = V_{CC} - 2V$  with  $R_t = 50\Omega$ ) does not apply here. The [Figure 3-4](#) is an equivalent termination scheme.

## 3.3 ECL Differential Configuration (DMUX Only)

**Figure 3-5.** DMUX Configuration with ECL Differential

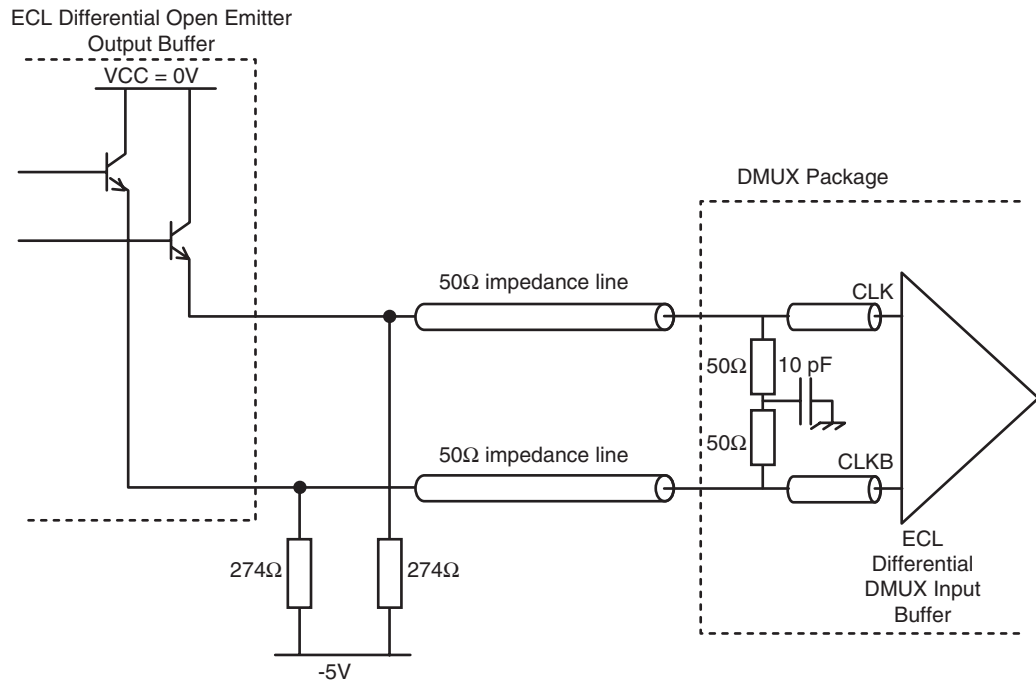


Note: Since the ADC is already terminated, the standard termination scheme for the ECL driver ( $V_{TT} = V_{CC} - 2V$  with  $R_t = 50\Omega$ ) does not apply here. The [Figure 3-5](#) is an equivalent termination scheme.

## 4. Digital Input Termination Techniques for the DMUX

The termination technique recommended for the DMUX Data inputs is similar to the one used for the DMUX input clock, since all the DMUX input buffers have been designed according to the same architecture.

**Figure 4-1.** Digital Input Configuration

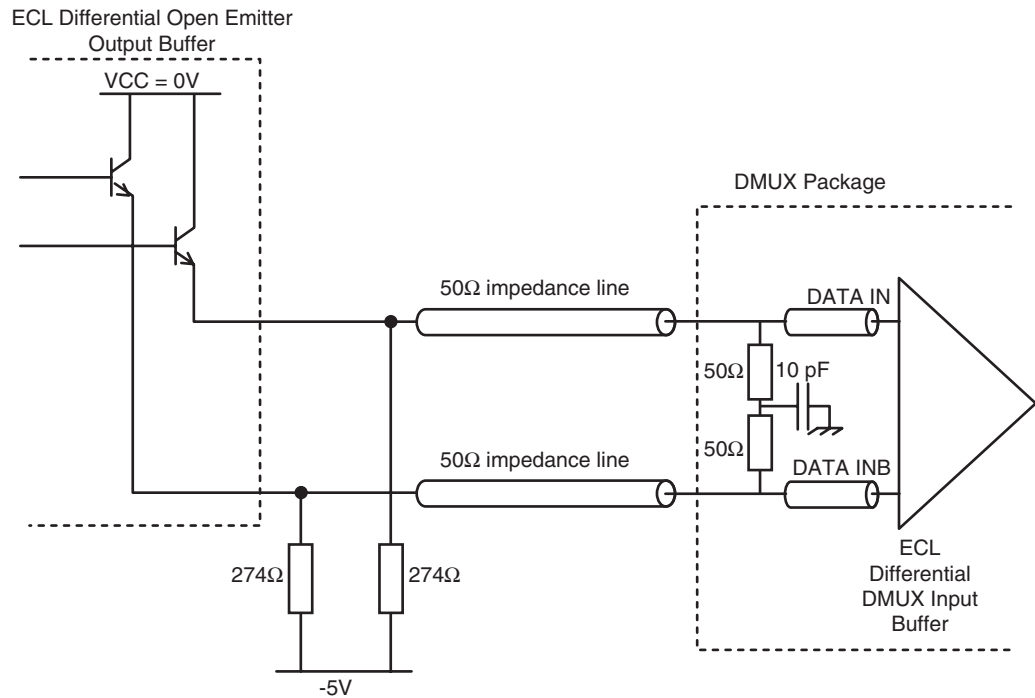


Note: Since the ADC is already terminated, the standard termination scheme for the ECL driver ( $V_{TT} = V_{CC} - 2V$  with  $R_T = 50\Omega$ ) does not apply here. The [Figure 4-1](#) is an equivalent termination scheme.


## 5. Data Output Termination Techniques

### 5.1 Open Loaded Termination (ADCs)

**Figure 5-1.** TS8388Bx and TS8308500 Open Loaded Output Termination

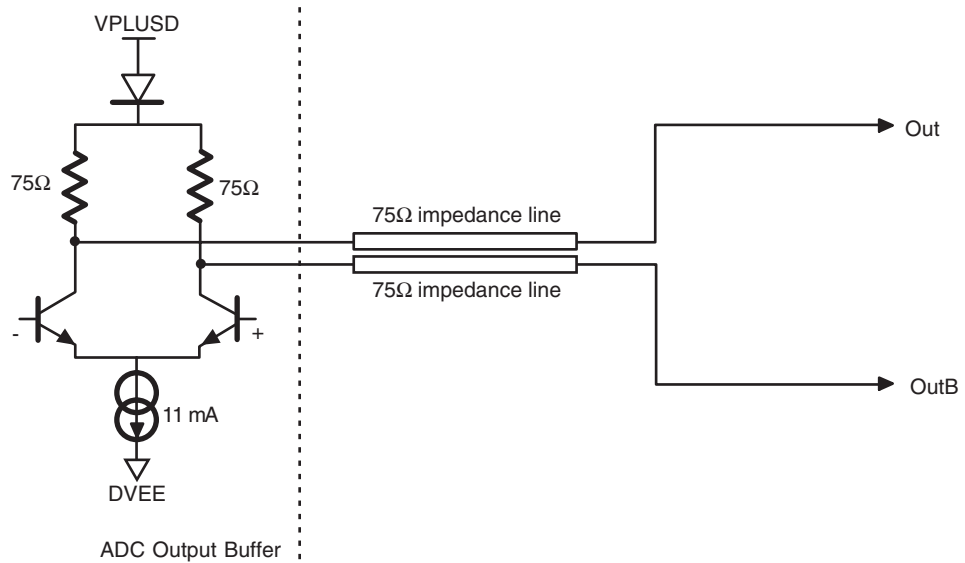

**Figure 5-2.** TS83102G0 Open Loaded Output Termination

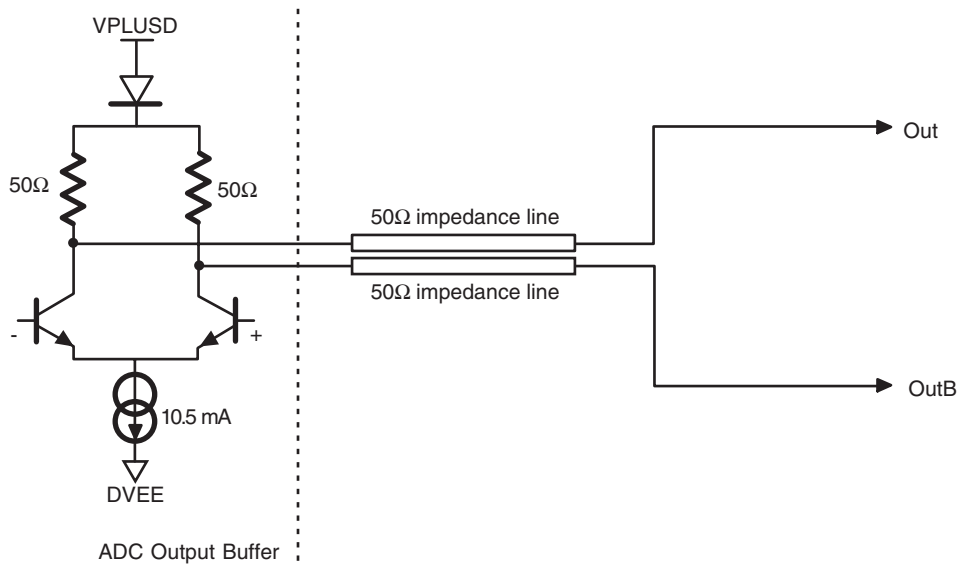


In the previous configurations, the output level is determined by  $V_{PLUSD}$ . ECL/LVDS modes are available (refer to the product data sheets for more information).

## 5.2 75Ω Termination

For TS8388Bx and TS8308500 Only


**Figure 5-3.** TS8388Bx and TS8308500 75Ω Termination

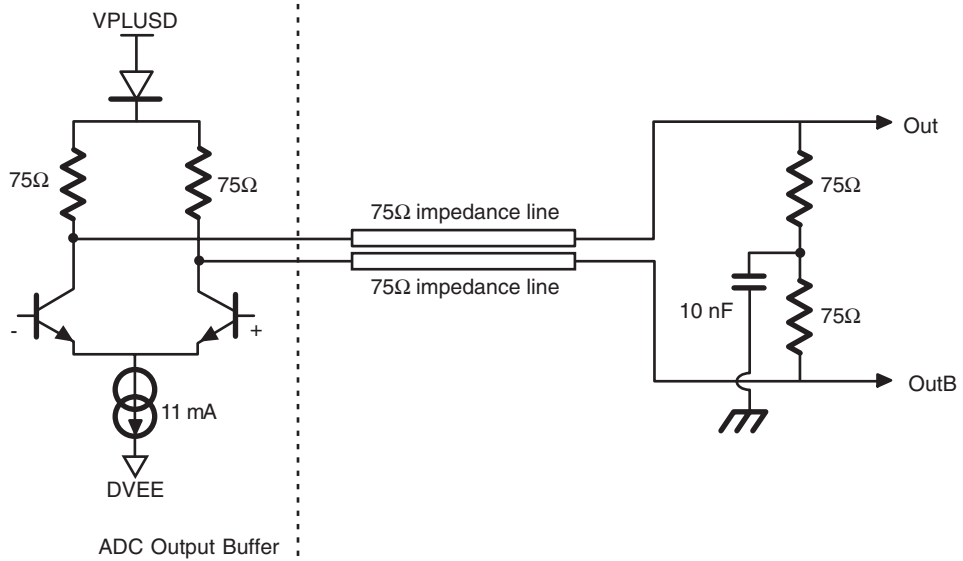

## 5.3 50Ω Termination


For the TS8388BX and TS8308500 ADCs

**Figure 5-4.** TS8388Bx and TS8308500 50Ω Termination

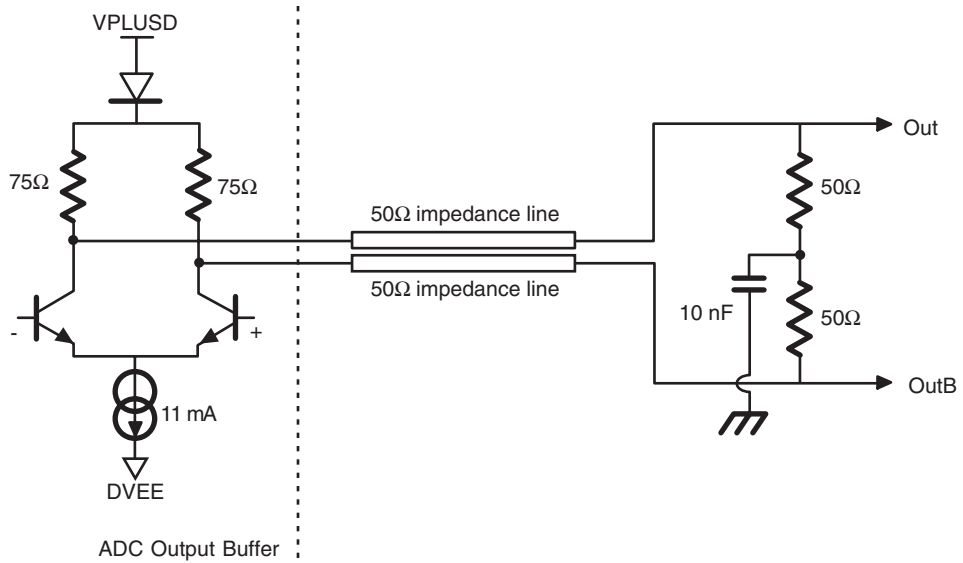

For the TS83102G0 ADC

**Figure 5-5.** TS83102G0 50Ω Termination

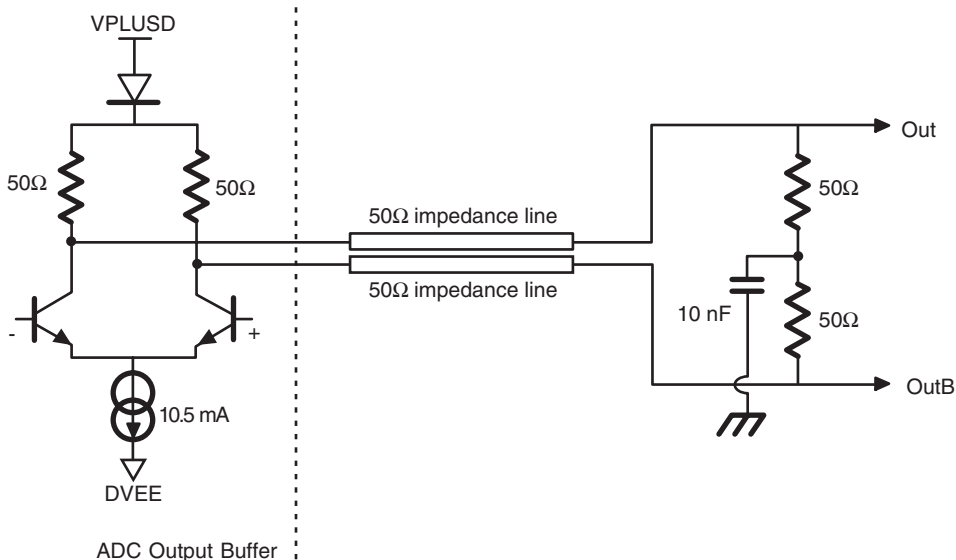


## 5.4 (VTT + R) Termination (DMUX Only)


In the specific case of the e2v DMUX, the output buffers need to be terminated with a “VTT + R” termination (see the different schematics) because the DMUX output buffers are in open-emitter configuration.

There are three types of output signals for the DMUX: Data Ready, Digital Output Data and Reference Voltage. All of them have the same behavior against  $V_{PLUSD}$  and Swing Adjust, and their associated buffers are similar.


**Figure 5-6.** DMUX Differential Data Ready Output Buffer

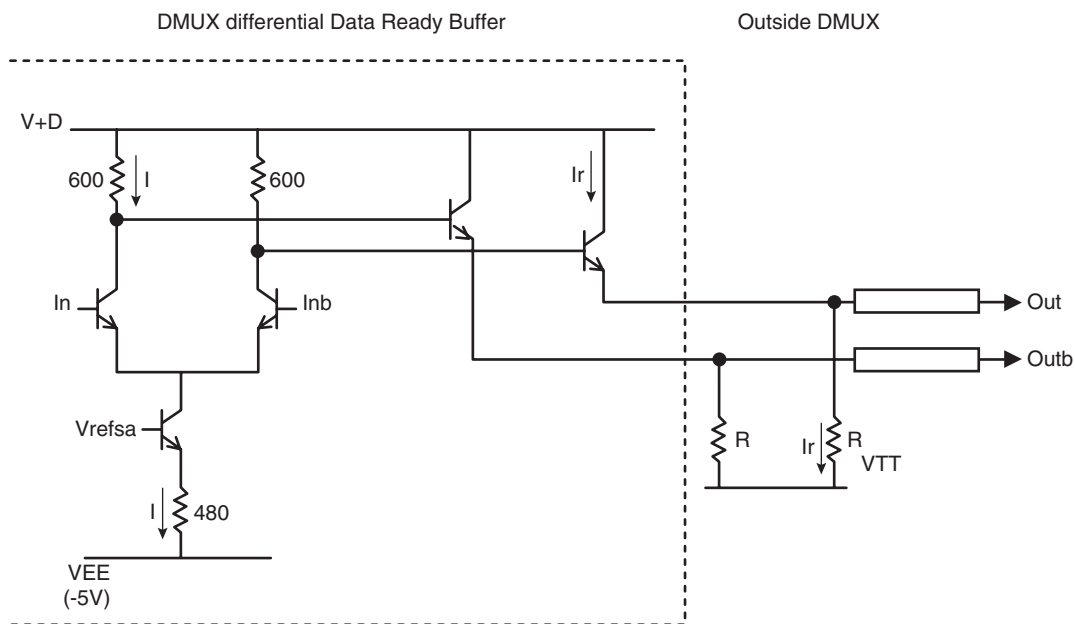

**Figure 5-7.** DMUX Digital Output Data Buffer

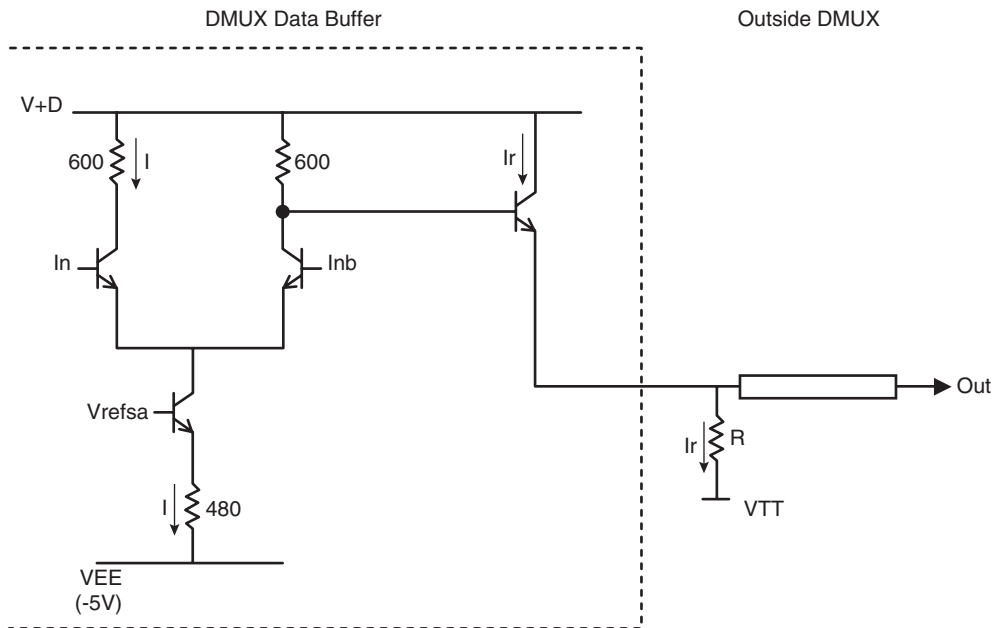

**Figure 5-8.** DMUX Reference Buffer

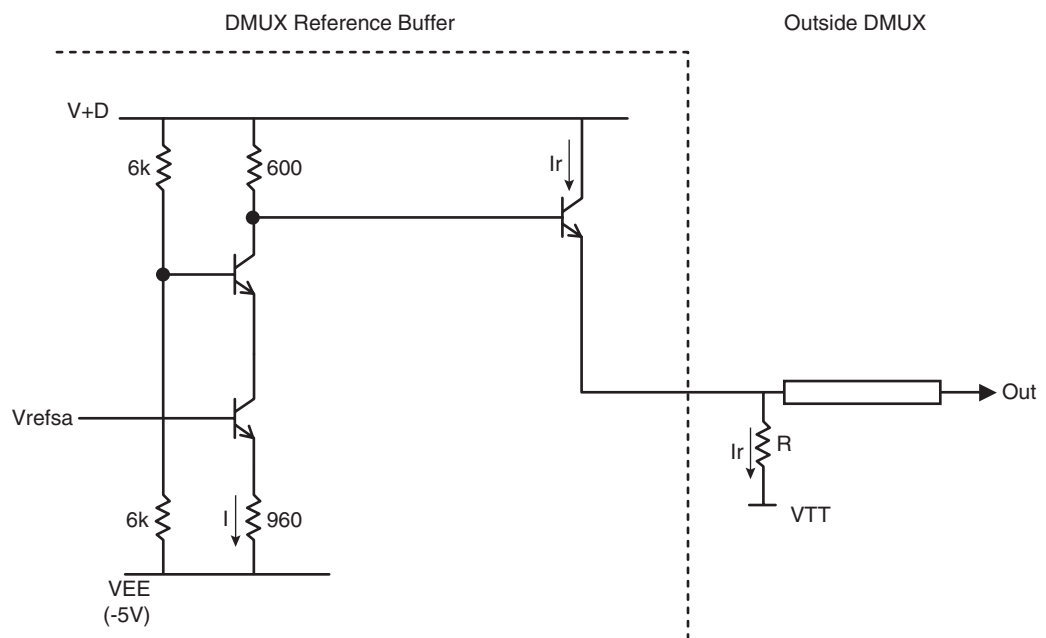

The only care to be taken to terminate these output buffers properly is to make sure that the output current  **$I_r$  never exceeds 36 mA**.

The relationship between  $V_{TT}$ ,  $R$ ,  $I_r$  and  $V_{out}$  (output voltage level) is given here:


$$I_r = \frac{V_{out} - V_{tt}}{R}$$



## 6. Block Diagram


### 6.1 TS81102G0 DMUX

Figure 6-1. TS81102G0 DMUX Block Diagram

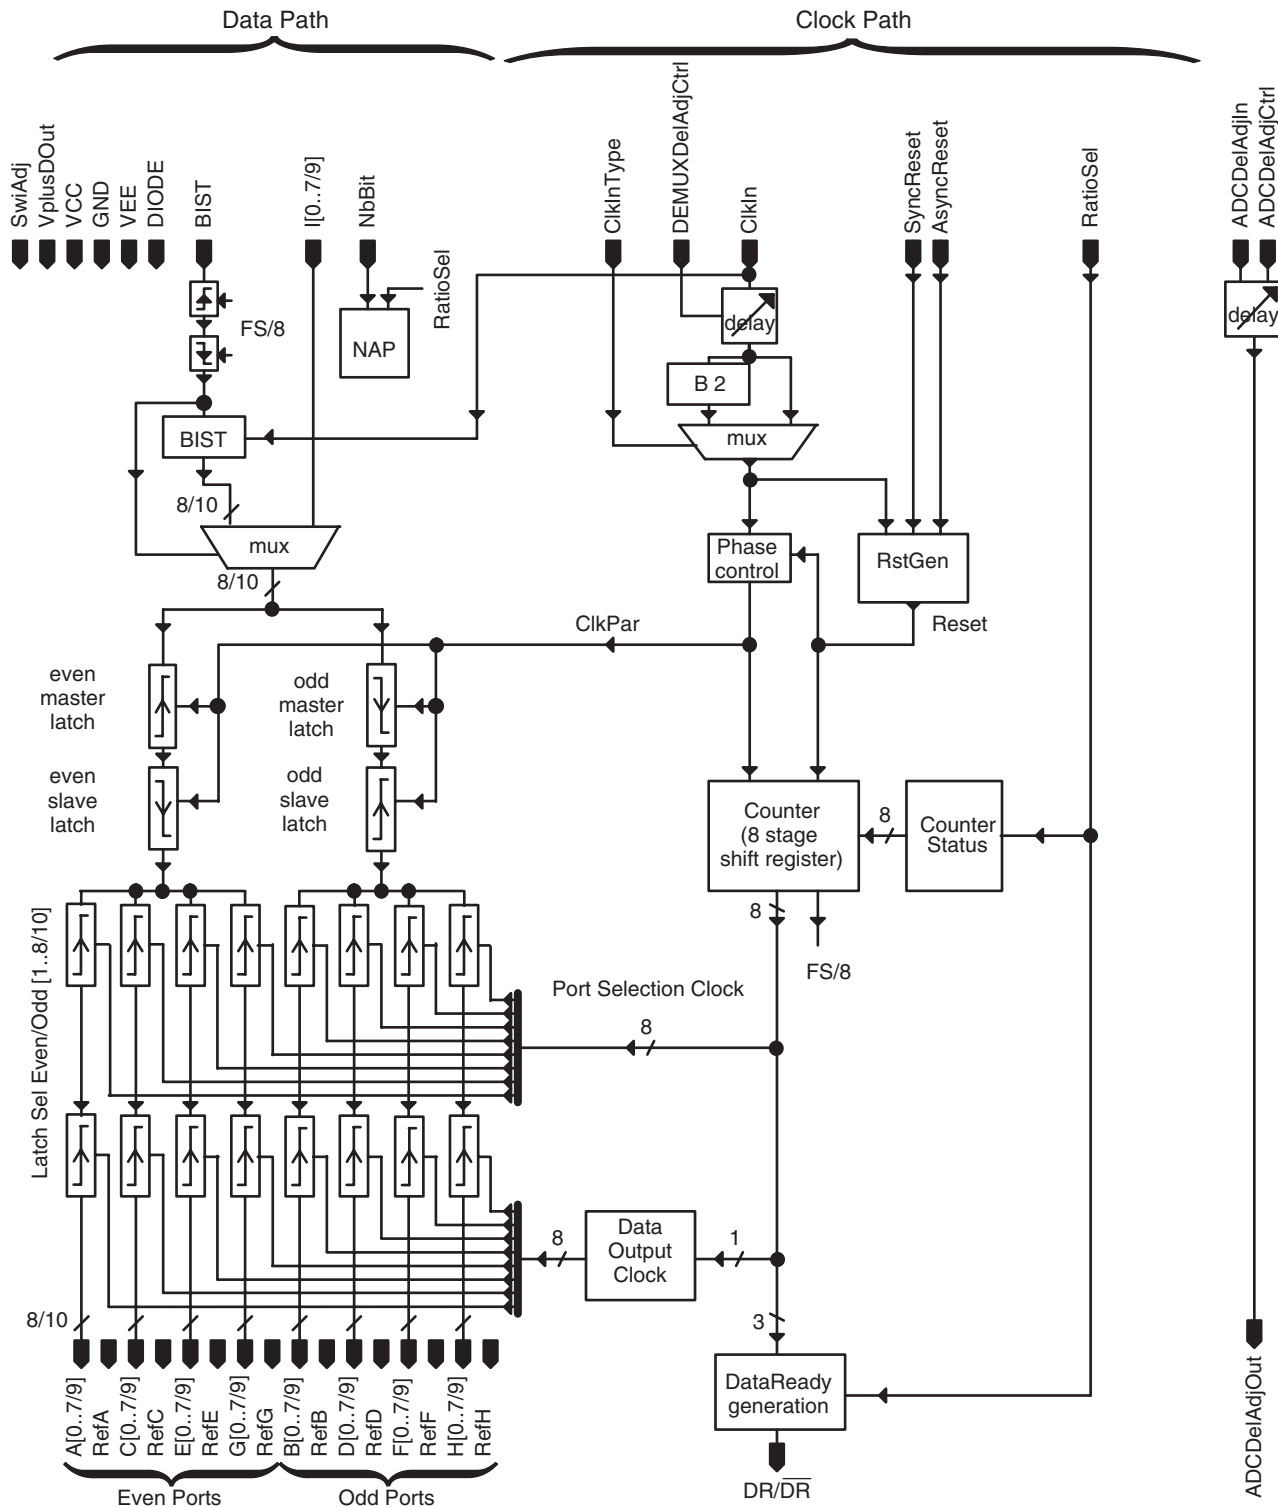


## 6.2 TS8388B ADC

Figure 6-2. TS8388B ADC Block Diagram

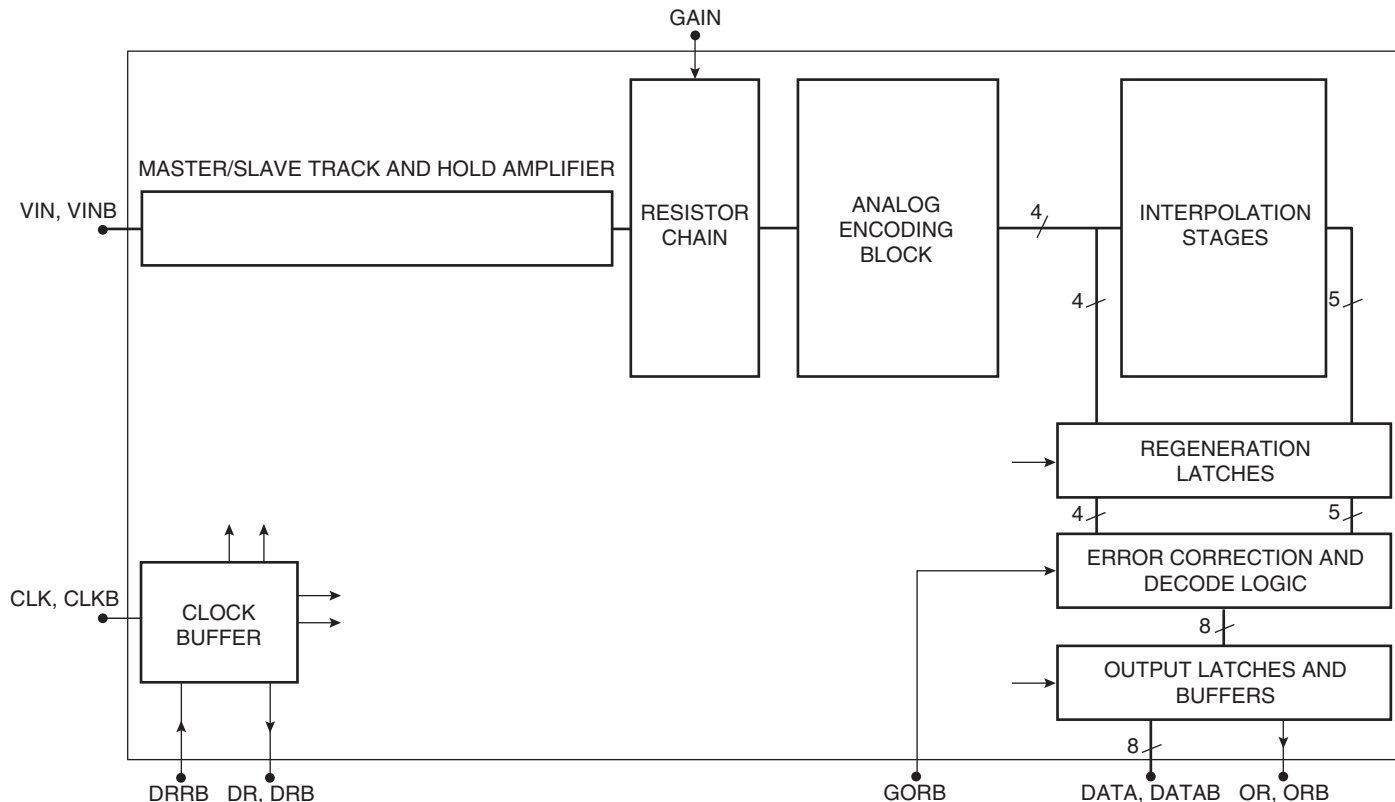

## 6.3 TS83102G0 ADC

Figure 6-3. TS83102G0 ADC Block Diagram

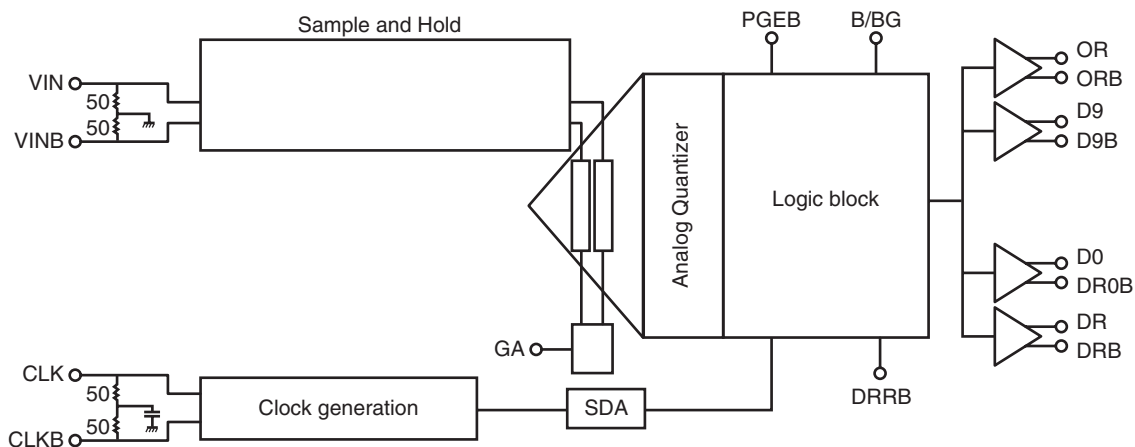


## 7. Internal Timing Diagram

### 7.1 DMUX Timing Diagram

This diagram corresponds to an established operation of the DMUX with Synchronous Reset.


Figure 7-1. DMUX Timing Diagram

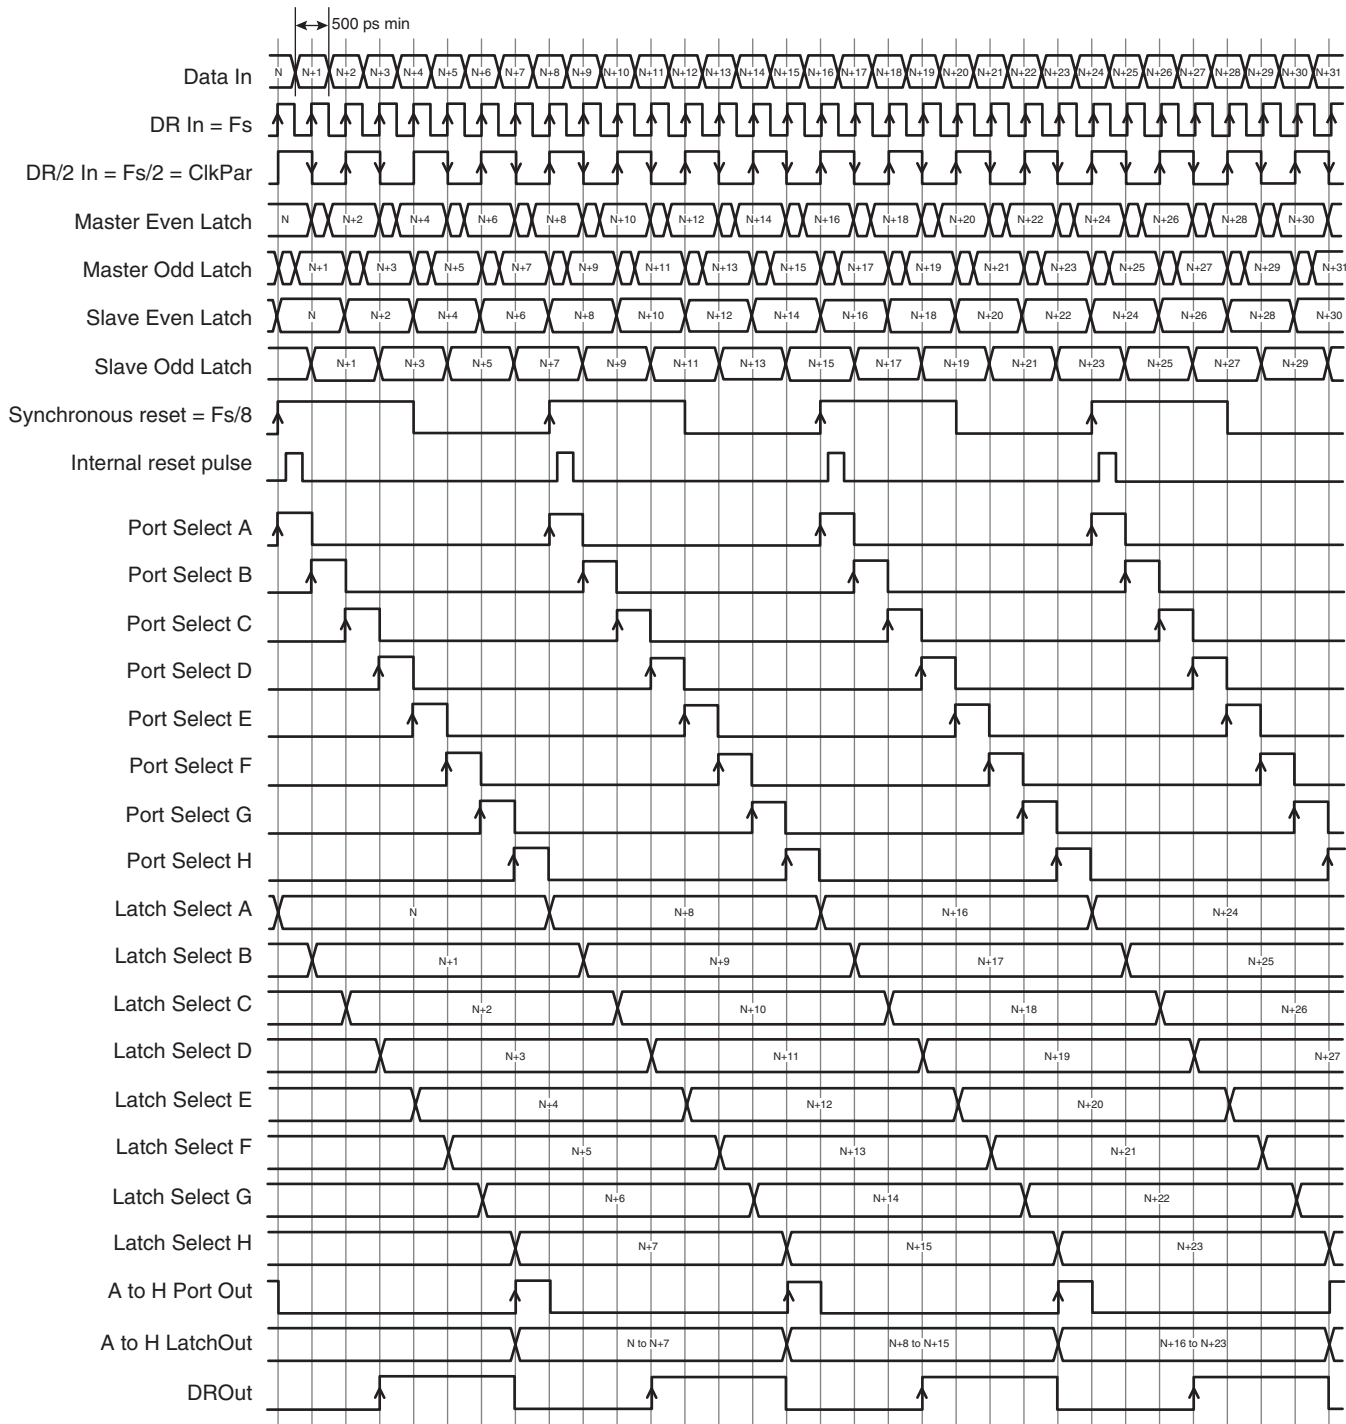


## 7.2 ADCs Timing Diagrams

The timing diagrams for the TS8388B and TS83102G0 ADCs are similar. Care should only be taken regarding the values of the specified timings (Refer to the corresponding device data sheets for more details).

**Figure 7-2.** Data Ready Reset, Clock Held at LOW Level

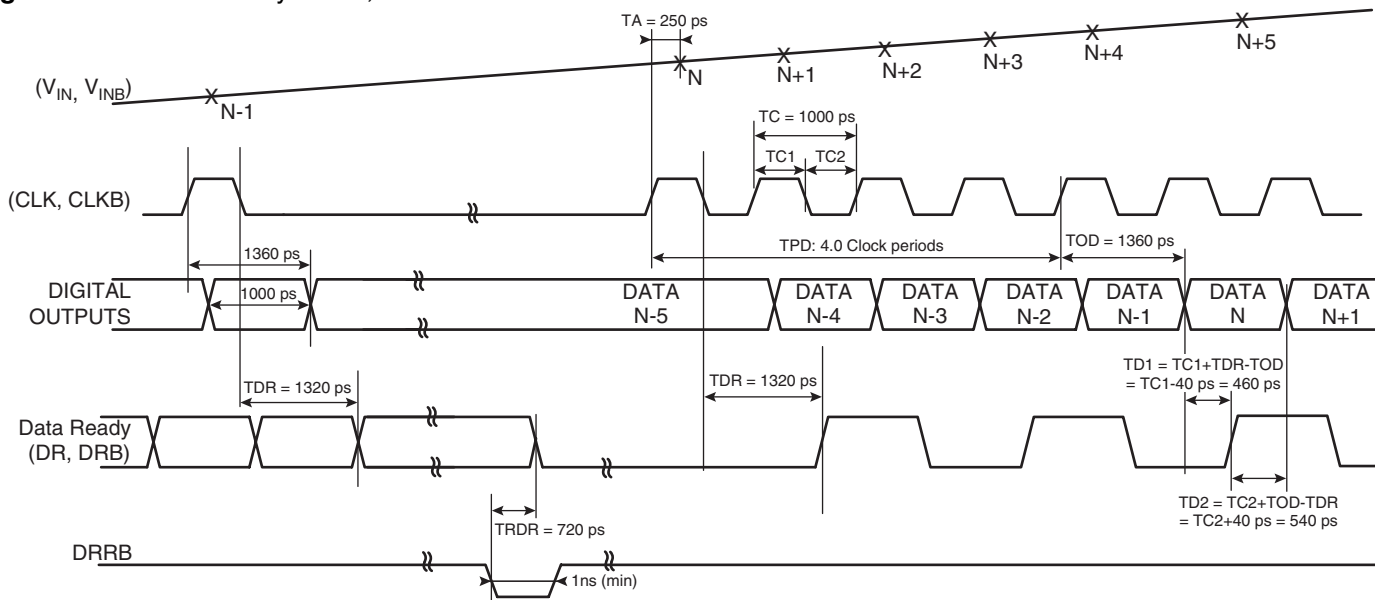


**Figure 7-3.** Data Ready Reset, Clock Held at HIGH Level

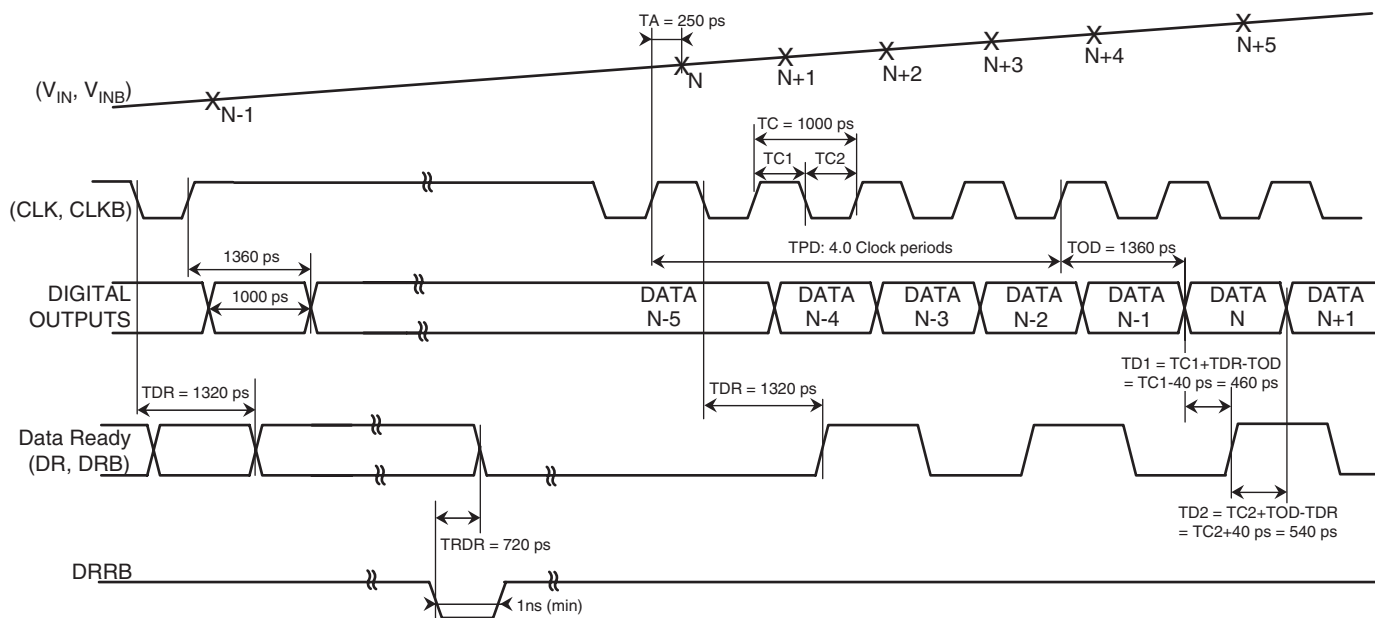

## 8. ADC and DMUX Testbench

Figure 8-1. Example of ADC and DMUX Testbench

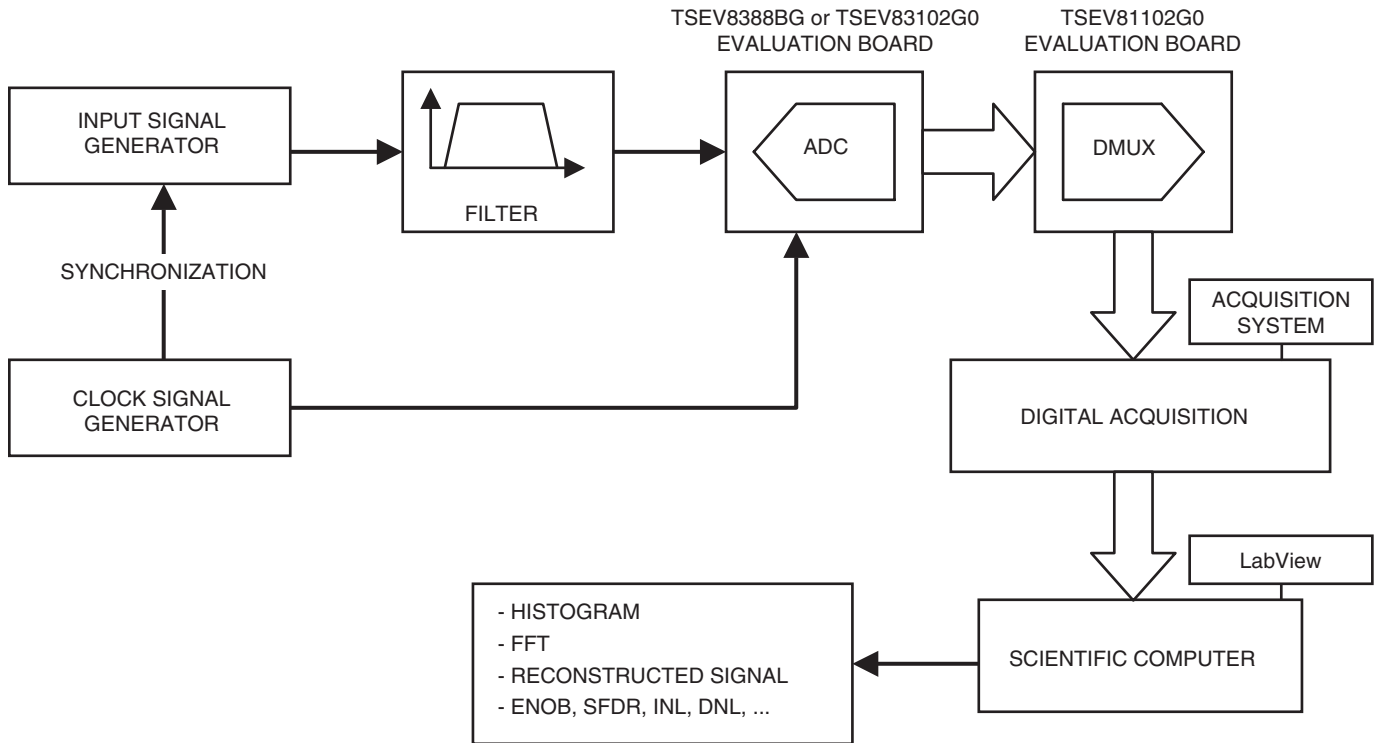



## How to reach us

Home page: [www.e2v.com](http://www.e2v.com)

### Sales offices:

#### Europe Regional sales office

##### e2v ltd

106 Waterhouse Lane  
Chelmsford Essex CM1 2QU  
England

Tel: +44 (0)1245 493493

Fax: +44 (0)1245 492492

mailto: [enquiries@e2v.com](mailto:enquiries@e2v.com)

##### e2v sas

16 Burospace  
F-91572 Bièvres Cedex  
France

Tel: +33 (0) 16019 5500

Fax: +33 (0) 16019 5529

mailto: [enquiries-fr@e2v.com](mailto:enquiries-fr@e2v.com)

##### e2v gmbh

Industriestraße 29  
82194 Gröbenzell  
Germany

Tel: +49 (0) 8142 41057-0

Fax: +49 (0) 8142 284547

mailto: [enquiries-de@e2v.com](mailto:enquiries-de@e2v.com)

#### Americas

##### e2v inc

520 White Plains Road  
Suite 450 Tarrytown, NY 10591  
USA

Tel: +1 (914) 592 6050 or 1-800-342-5338,

Fax: +1 (914) 592-5148

mailto: [enquiries-na@e2v.com](mailto:enquiries-na@e2v.com)

#### Asia Pacific

##### e2v ltd

11/F.,  
Onfem Tower,  
29 Wyndham Street,  
Central, Hong Kong

Tel: +852 3679 364 8/9

Fax: +852 3583 1084

mailto: [enquiries-ap@e2v.com](mailto:enquiries-ap@e2v.com)

#### Product Contact:

e2v

Avenue de Rochepleine  
BP 123 - 38521 Saint-Egrève Cedex  
France

Tel: +33 (0)4 76 58 30 00

#### Hotline:

mailto: [hotline-bdc@e2v.com](mailto:hotline-bdc@e2v.com)

Whilst e2v has taken care to ensure the accuracy of the information contained herein it accepts no responsibility for the consequences of any use thereof and also reserves the right to change the specification of goods without notice. e2v accepts no liability beyond that set out in its standard conditions of sale in respect of infringement of third party patents arising from the use of tubes or other devices in accordance with information contained herein.